

# PRODUCT INFO

## SPORT-ROLLER CORE

Lowrider or rear pannier with QL2.1 system

QL2.1 system

IP 64


PD620

PS490



- ← D-ring for shoulder strap (optional)
- ← Buckles for fixing the rolling closure
- ← High-quality 3M Scotchlite reflector

- Carrying handle for mounting and releasing the QL2.1 system
- QL2.1 rail for fast fixing to the rack or lowrider
- Semi-elliptical hook rail with QL hook (adjustable in 15° steps)
- Abrasion protector
- Edge protector with slots for mounting the Pannier Carrying System

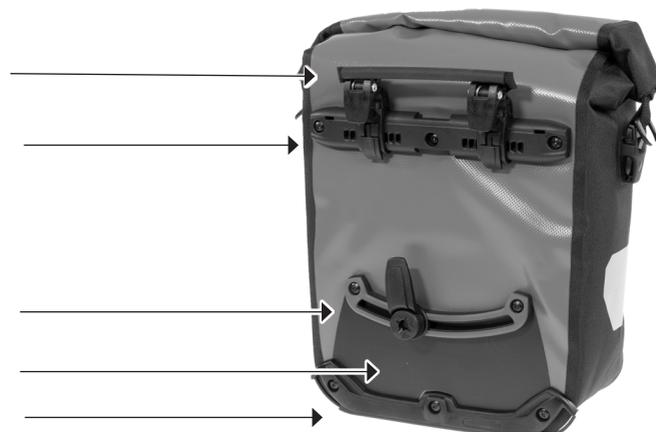

Height cm/in	Width cm/in	Depth cm/in	Volume L/cu.in.	Weight g/oz.	Max. capacity kg/lbs.
37/14.6	26/10.2	16/6.3	14,5/885	710/25.0	9/19.8

## SPECIFICATIONS:

- + Waterproof bike pannier ideal as starter model
- + Can be used individually or as pair as small rear pannier or for the lowrider
- + Sides of PS490, front and back of PD620
- + QL2.1 mounting system
- + For racks with a diameter up to 16 mm, reduction pieces for 8 mm, 10 mm and 12 mm rack diameters included
- + Top QL hooks and lower sliding hook adjustable without tools
- + Lower hook rail with anti-scratch function to protect the luggage carrier
- + Symmetrical shape allows use on right or left side
- + Highly reflective 3M Scotchlite reflector
- + Ideal for use on children's/youth bicycles
- + Easy to clean inside

**Contents:** Pannier comes as single bag, Hook inserts 8, 10 and 12 mm

**Optional accessories:** Pannier Carrying System, outer pocket 2,1 L, Mesh pocket, shoulder strap (No. E172), hooks 18mm (E211) & 20mm (E193)

**Attention:** Maximum load per pannier is 9kg / 20 lbs. We recommend weighing each loaded pannier to confirm that the maximum allowance of the pannier fixation is not exceeded. This practice is advised for both rear and front panniers. CAUTION: The maximum weight capacity of every carrier model is different. Please observe the maximum weight allowance of the carrier fitted to your bicycle. Note: Sometimes the maximum capacity of the panniers fixing system can exceed the maximum capacity of the carrier. DO NOT exceed the maximum capacity of the carrier! Note, that the use of panniers will significantly influence the handling properties of your bicycle.

**Attention:** As abrasion cannot be ruled out, we recommend that all points where the mounting system contacts the bicycle rack or frame be protected by scratch protection film.

**Note:** In order to meet standard IP64 (6=dustproof 4=protected against splash water coming from all directions) the lid must be rolled 3-4 times.

